


Railway Depot Equipment Universal Spring Testing Machine

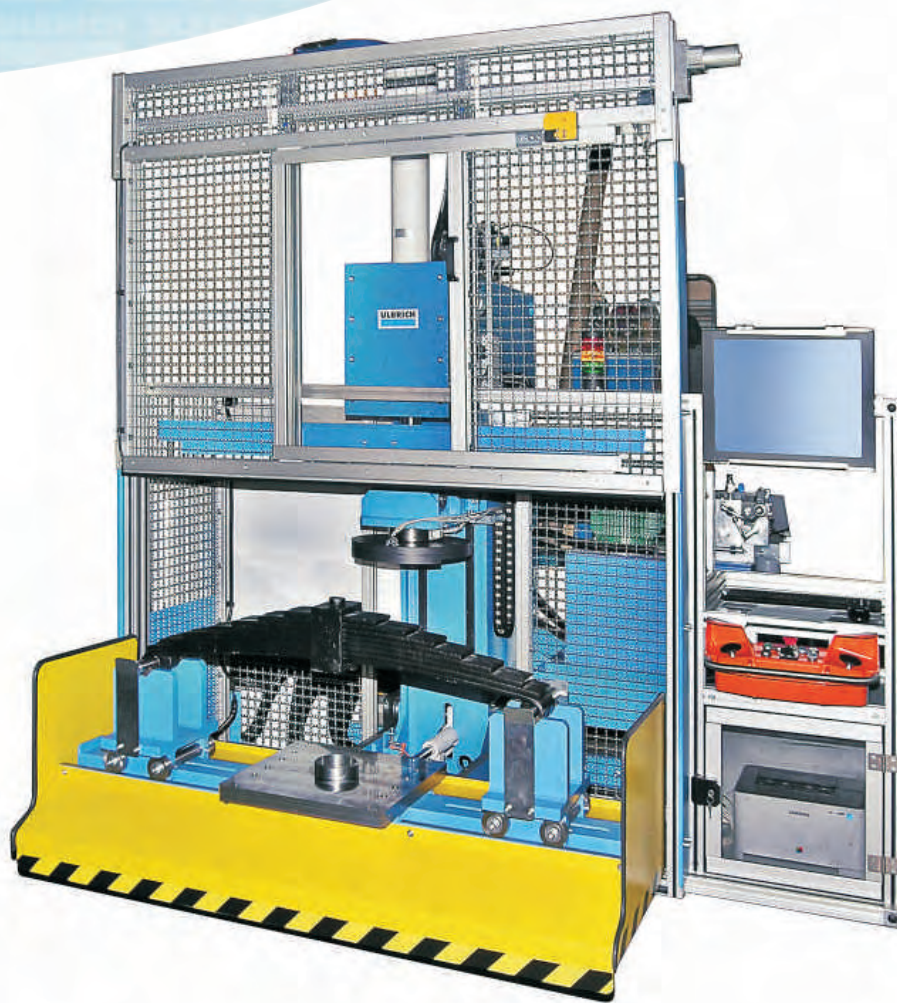

ULBRICH

www.ulbrich-group.com

Process-Integrated determination of data characteristics and Quality control of Leaf and Coil springs

Springs need to be regularly inspected and their load carrying, energy absorption and elasticity characteristics controlled and recorded.

This testing is carried out by approved rail and rolling stock maintenance organisations. The major elements of testing include the analysis of impact force on springs and the resulting correlation between compression achieved in relation to the height for coil springs, and in the case of leaf springs the relationship between the changing of length as the force is applied and then removed.

The force over distance controlled Ulbrich Spring Testing Machine enables the operator to carry out all the Statutory testing requirements. Upon tensioning and subsequent release of tension, the resulting compression and in the case of leaf springs the changing length; will be

recorded by distance and force sensors. Using this saved information, the load carrying capacity, height and even the entire spring characteristic curve can be calculated. This allowing the rail test centre to use the data from every test cycle to compare the pre-programmed values defined by the Set tolerances with those actually achieved. The analysis of required / acceptable values with those figures actually attained is presented on the Control Screen as I.O. (In Order) or as N.I.O. (Not In Order) and is automatically saved. In addition to this function it is also possible to print this result onto a label to be then directly attached to the corresponding spring. Springs can now be paired up safely by analysing the information printed on the labels. Only those springs lying within allowable parameters can be paired up. The resulting spring characteristics curve can also be printed if this should be requested for documentation. The test

run for every type of spring is pre-programmed and can be called up by the operator by entering the relevant programme number.


The name of the operator, sequential number and all other important factors are automatically saved for every test cycle.


In addition to fulfilling the criteria of the quality and safety regulations, the utilisation of the fully automatic spring feeder and integrated test run systems enables the railway test and service department to raise their efficiency and safety levels whilst also optimising productivity.





With the addition of an extra press surface module, the ability to measure and record lateral deformation, lateral forces / vectors of coil springs can also be integrated.

Basic characteristics of the control and test software



- Simple Windows-based control screens
- Programme memory capable of multiple
- Press cycles / multiple spring types
- Programme call up via Part No., Contract No., or other variables
- Protocol records operator name, part No., Contract No.
- All relevant process data presented on a visually accurate and easy to read screen layout
- Actual real time values are displayed throughout press cycle
- Result of press, i.e. N.I.O. or I.O. displayed on control screen
- Operational hours and No. of parts tested; displayed & recorded
- Press result, operator, date & time, programme No., plus all system relevant data in numerical and graphical format is registered after every press run and saved on the P.C's Hard Drive
- The test results can be printed in the form of a Test Protocol or even printed as a label
- Statistical analysis optional
- Network connectivity
- Further interpretation and utilisation of results via standard software is possible upon request
- Memo fields can be integrated upon request

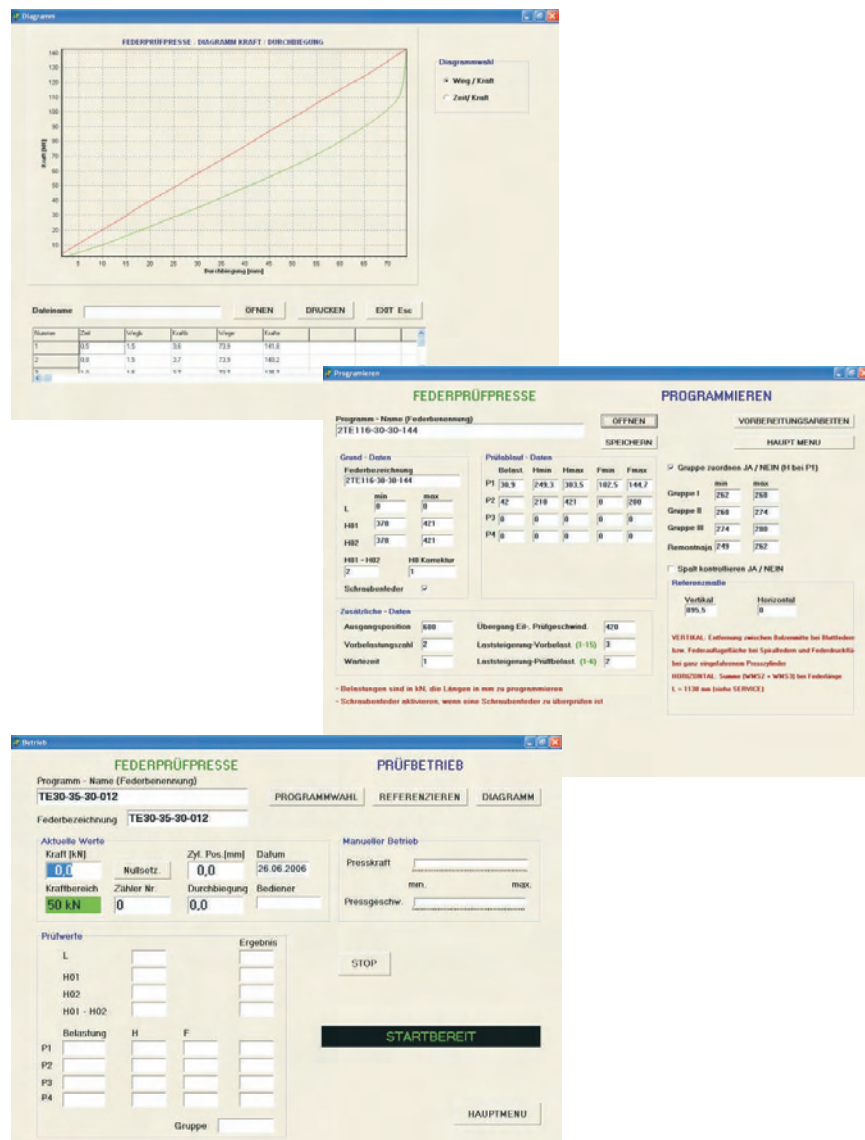

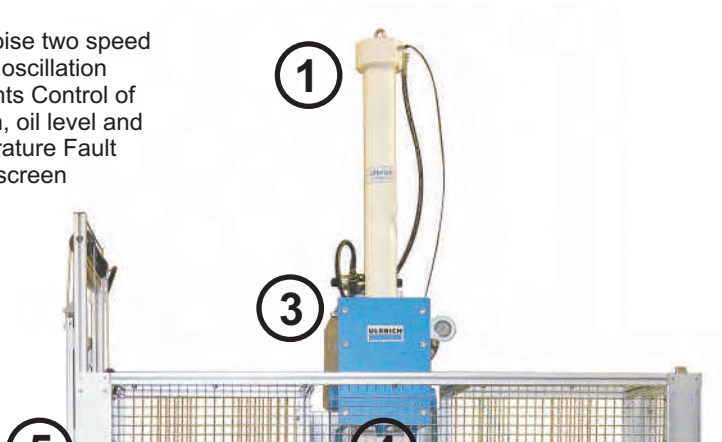- ① High resolution / fully integrated distance measurement & control
 - ② Extra guide cylinder also prevents any unwanted rotational movement
 - ③ Independent fine tuning of distance over force via high precision proportional hydraulic block
 - ④ Highly robust precision loadcell, the option of a second loadcell provides the option of a second measurement range
Calibration function is included in the software
 - ⑤ The entire working area is enclosed by a safety mesh additional protection and safety components can be integrated upon request
 - ⑥ Press plate for leaf springs positioning beneath the plate via transport guides
 - ⑦ Communication via PC, industry PC or notebook in order to set test parameters, to display, analyse and save results
 - ⑧ Spring contact surfaces and press plates easily interchangeable
 - ⑨ Rolling bearings can be easily adjusted in accordance to the spring size
 - ⑩ Powered by low noise two speed pump mounted on oscillation dampening elements Control of filter contamination, oil level and operational temperature Fault display on control screen
 - ⑪ Open and easily accessible space for simple loading and unloading of heavy springs by fork-lifter or crane
 - ⑫ Wide and adjustable pedestal, hence no special flooring or extra foundations needed
Elongation of the press itself is compensated by the Spring Tester Software. Simple Windows based programming following the pre-defined requirements and test parameters set out by the relevant Governing Statutory Authority
- 

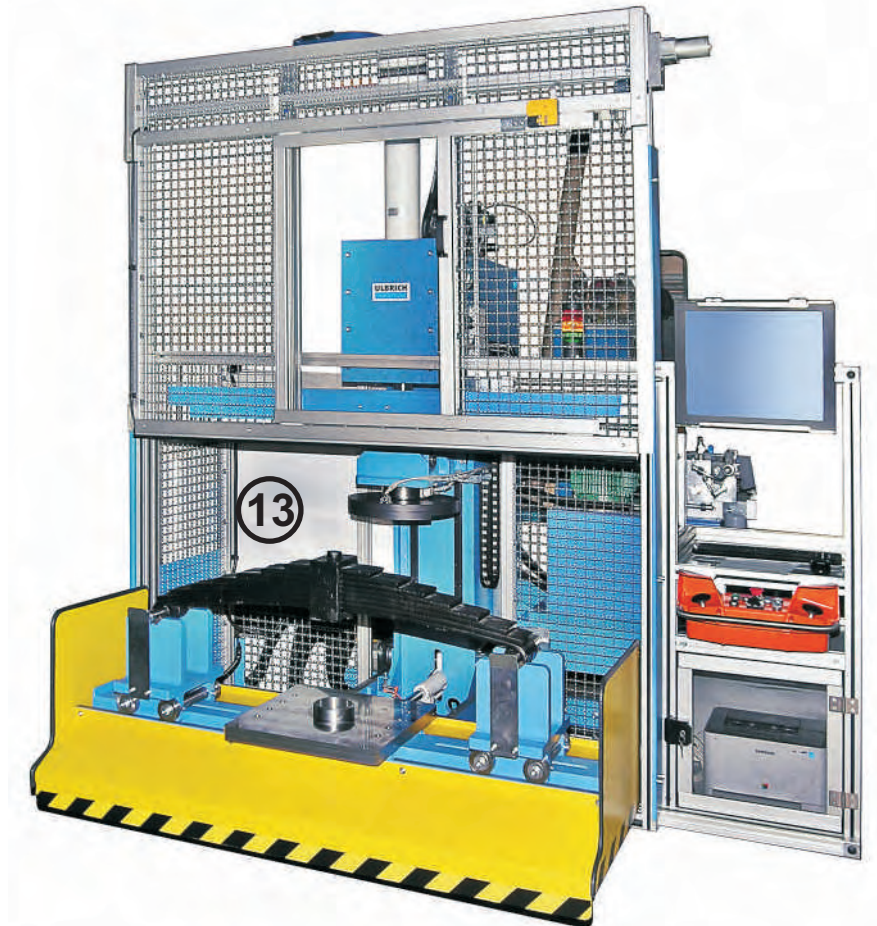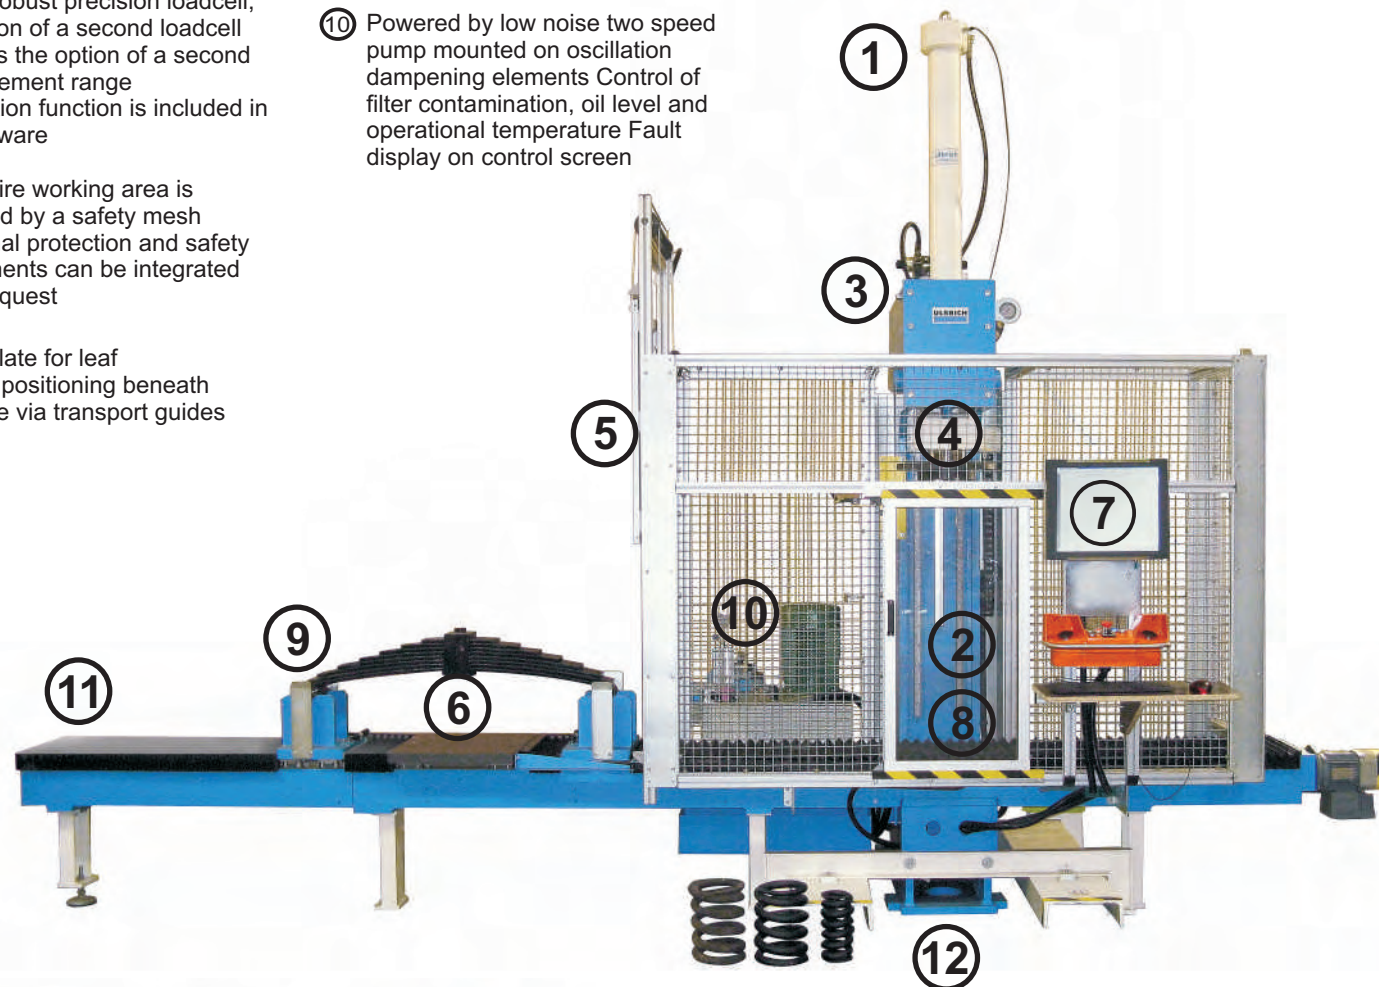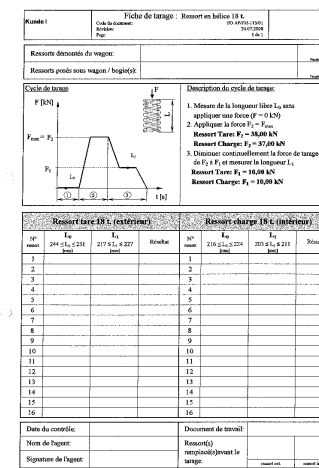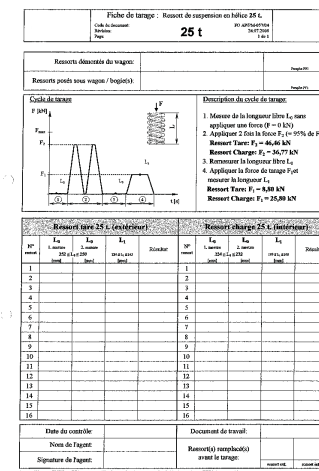

- ⑬ Optional: Centerpoint position
measuring of leave springs
- ⑭ Optional: Lateral displacement,
forces measurement of coil
springs

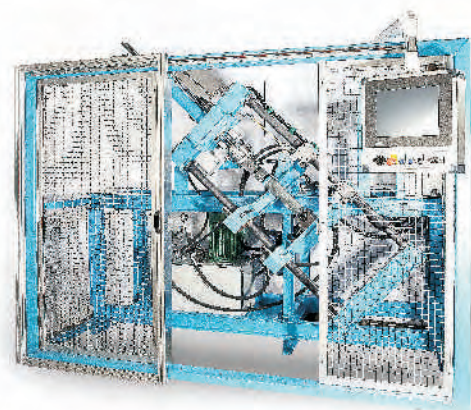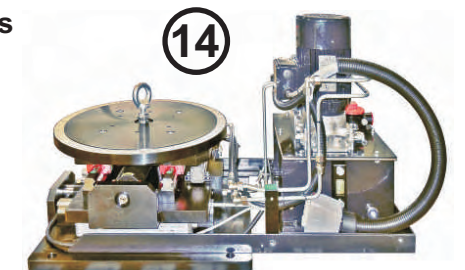

Spring and Shock Absorber Testing Machine



Buffer Testing Machine




Chockblock Testing Machine




Central Coupler Testing Machine

Performance and Technical Data

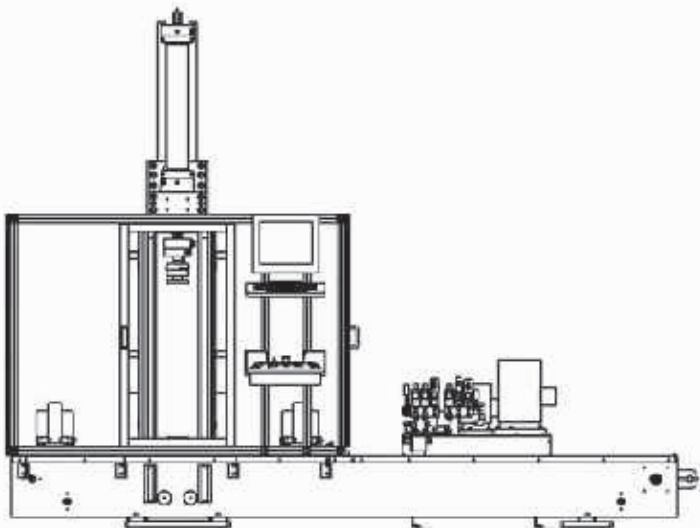

Left or right insertion Machine

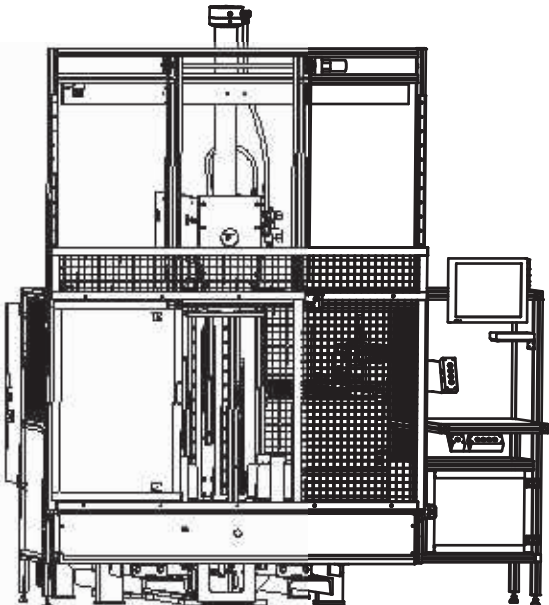

Front insertion Machine

Force	Nominal force max.	200 kN	Speed mm/sec	Press speed	30
	Control range	10-195 kN		Feeding speed	70
	Deviation of force control	<2%		Return speed	70
	Testing Force Range 1	20-195 kN	Weight kg	Motor	4500
	Testing Force Range 2, (Optional)	5-50 kN			
	Deviation range (from 10% of nominal force)	<1%	Performance kW	left, right or front according to customer specification	5,5
	Display resolution accuracy	0,1 kN			
Position mm	Total stroke	700	Spring insertion		
	Measuring accuracy	0,01			
	Positioning accuracy	0,1			
	Display resolution accuracy	0,1			

Option to measure the angle of deflection, lateral displacement and the lateral forces of coil springs


In addition to the analysis of the spring characteristics curve it is necessary to measure the angle of deflection, lateral displacement and the lateral forces of coil springs. This is especially important with regards to matching up opposing transverse springs (left-right) assembled in railway undercarriages. Here it is absolutely essential to match together corresponding transverse spring characteristics in order to avoid lateral distortions when the wheel set springs are in compression. The specially designed Ulbrich X-Y lateral force measurement system (loose sled-slide rails) enables the operator to measure both the lateral movement as well as the actual displacement from the centre of the spring. Both values can be combined in the analysis / test protocol.


TYPICAL TEST-RUN

A spring is inserted and the X-Y table then utilises position encoders to measure the lateral displacement, the direction of displacement together with the vertical displacement resulting from the (press stroke mm) compression of the spring. The vector resulting from the specific force / displacement is recorded. The X-Y platform and compressed spring is then driven back to the central axis position of the spring by hydraulic cylinders by retracing the recorded vector data.


Actual re-position force applied in order to bring the spring to the back to the central axis position is measured by precise load cells. We are now in a position to plot the actual correlation between compression force , lateral displacement (mm) and lateral displacement force (kN).

Resulting values are then classified in a test protocol as being I.O. or N.I.O. which is displayed on the PC screen in accordance with the customer specifications entered into the test protokol. The X-Y work table can be easily fitted and also removed should the operator need to test parabolic springs where the X-Y system is not required.

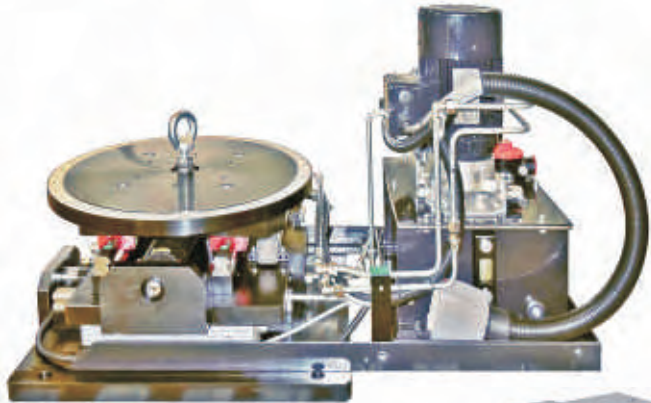

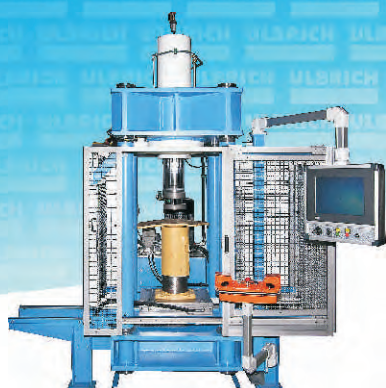

Puffer Testing Machine

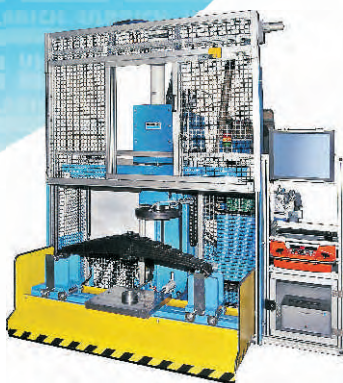

Spring Testing Machine



Shock Absorber Testing Machine

Machines for testing assembling & joining

ULBRICH

Competence in joining and testing machines, as well as in hydraulic solutions

We are a Privately owned Austrian Engineering company with Sister companies operating throughout Central and Eastern Europe.

Our main focus is based on the design, construction and the distribution of :

Hydraulic Press and Test Equipment

Hydraulic Components

Hydraulic Systems

Our goal is to provide customers with Test and Production equipment that enable our customers to sink their production costs and increase efficiency, quality and ultimately provide our customers with a significant competitive advantage.

In addition to our standard machinery we also work together with our customers to provide bespoke special hydraulic machines and system solutions based on their unique specifications.

Please visit us at our website



Press fit and analysis units

ULBRICH

www.ulbrich-group.com



Press fit and analysis units

Maschinen zum Prüfen Montieren & Fügen

ULBRICH

Kompetenz in Füge- und Prüfmaschinen sowie Hydraulik

Wir sind ein Familienbetrieb mit Stammsitz in Österreich und diversen Tochterbetrieben bzw. Niederlassungen in Zentral- und Osteuropa.

Wir beschäftigen uns – unter anderem – mit der Produktion und dem Vertrieb von:


Füge und Prüfmaschinen wie z.B. Feder-, Stoßdämpfer- und Pufferprüfmaschinen für die Bahnindustrie

Füge- und Prüfmaschinen für die Automobilindustrie

Ziel unserer Tätigkeit ist es, die Produktivität, Prozesssicherheit und Wettbewerbsfähigkeit unserer Kunden zu stärken.

Neben Serien Prüf- und Fügemaschinen erarbeiten wir gemeinsam mit unseren Kunden hydraulische Sondermaschinen und Hydraulikanlagen für deren spezifische Bedürfnisse.

Bitte besuchen Sie uns auf unserer Webseite



Spring and Shock Absorber Testing Machine



Chockblock Testing Machine



Central Coupler Testing Machine

A – 2512 Tribuswinkel
Josefsthalerstr. 34
Tel.: +43/2252/802 13
Fax: +43/2252/806 59
office@ulbrich.at
www.ulbrich.at

D – 795 39 Lörrach
Im Vogelsang 10
Tel.: +49/7621/162 021
Fax: +49/7621/162 022
info@ulbrich-maschinenbau.de
www.ulbrich-maschinenbau.de

CZ – 251 68 Sulice
Zelivec 344
Tel.: +420/323 673 046
Fax: +420/323 673 047
ulbrich@ulbrich.cz
www.ulbrich.cz

H – 2038 Soskut
Ipari Park 063/19
Tel.: +36 23 560 017
Fax: +36 23 560 018
office@ulbrich.hu
www.ulbrich.hu

SI – 2367 Vuzenica
Sv. Vid 26
Tel.: +386/2/88 79 910
Fax: +386/2/88 79 919
info@ulbrich.si
www.ulbrich.si

SK – 823 62 Bratislava
Revolucna 23
Tel.: +421/2/434 240 16
Fax: +421/2/432 959 83
bratislava@ulbrich.sk
www.ulbrich.sk